

# ESCO

## LIGHTING, INC.

### WPDQR SERIES

Five Minute Installation Wall Pack

**\*EZ5 Mounting Systems**

For **Recessed** Power Supply Installations

Philips QL Induction Lamp

With Average Rated Life of 100,000 Hours

Dark Sky Friendly Lighting Fixture

#### SPECIFICATIONS

**Housing:** Die cast aluminum housing and door powder coat finished architectural bronze (contact factory for other colors). Hinged door frame with two captive lock-up screws, one-piece silicone self-attaching door sealing gasket.

**Reflector:** Specular aluminum, designed for maximum efficiency.

**Lens:** Impact resistant tempered glass, silicone caulked to door frame.

**Ballast:** Philips QL induction high frequency electronic ballast. Operating in a range of 100V -120V or 220V-277V, see ordering information.

**Mounting System:** **\*EZ5 Mounting System** allows the contractor to install the fixture in 5 minutes or less (see illustration).

**Lamp:** Philips QL induction electrodeless fluorescent lamp with average rated life 100,000 hours. See ordering information.

**Labels:** ETL, CETL listed suitable for wet location. I.B.E.W. labeled.

**Fixture Warranty:** The mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for five years from date of shipment from the factory. All induction system components are warranted by the original manufacturer of the induction lighting system components, and subject to that manufacturer's warranty.

**Photometric Information:** Contact factory.



**SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE**

**Application:** Ideal for parking areas, entrances, walkways, underpasses, loading docks and tunnels.

#### Recessed Junction Box Installation:

Cast aluminum mounting bracket factory installed. Universal cast aluminum gasketed junction box mounting bracket supports fixture and mounts to junction box. Fixture supplied with quick disconnect wiring harness for supply wire to fixture connection.




STEP 1. Connect quick connector to power supply.

STEP 2. Attach cast aluminum mounting plate on recessed j-box.

STEP 3. Connect quick connector from power source to fixture.

STEP 4. Hang wall pack on mounting plate.

STEP 5. Secure wall pack to mounting plate with locking screw.

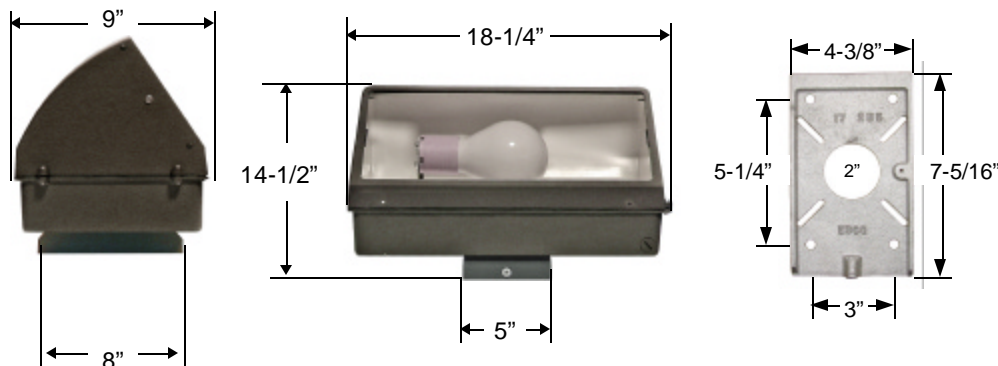

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505  
Phone: 773-427-7000 Fax: 800-217-1260 [www.escolighting.com](http://www.escolighting.com)

**A Woman-Owned Business**

**Established 1975**



**HOW TO ORDER**

**Recessed Power Supply Mounting System Voltage Suffix**

Catalog No.	Watts	Color Temp
WPDQ730R	55	3000k
WPDQ740R	55	4000k
WPDQ750R	55	5000k
WPDQ830R	85	3000k
WPDQ840R	85	4000k
WPDQ850R	85	5000k

1=120V
2=208V
3=240V
4=277V



**PHILIPS QL INDUCTION LAMP AND HIGH FREQUENCY ELECTRONIC BALLAST SYSTEM**

**ACCESSORIES**



**Photo Control**  
 Suffix Cat.# With  
 120 Volt =PC1  
 208-277 Volt =PC2



**Fuse and Fuse Holder**  
 Suffix Catalog Number With "F"



3254 North Kilbourn Avenue Chicago, Illinois 60641-4505  
 Phone: 773-427-7000 Fax: 800-217-1260 [www.escolighting.com](http://www.escolighting.com)

**A Woman-Owned Business**  
 Established 1975

