

## SPECIFICATIONS

**Housing:** Heavy duty die cast aluminum construction with corrosion resistant hardware. See finish note.

**Door Frame:** Heavy duty die cast aluminum, one piece silicone gasket, seals door frame to housing. See finish note.

**Lens:** Impact resistant clear tempered glass, silicone caulked to door frame.

**Reflector:** Anodized aluminum, designed for maximum efficiency.

**Ballast:** Pre-wired C.W.A., H.P.F. core and coil with capacitor.

**Lamp:** Clear medium base, (by others).

**Lamp Holder:** High heat 4 K.V. rated, w/nickel plated copper screw shell, spring loaded center contact, lamp grips, SF-2 leads (200° C). Impregnated gasket.

**Finish:** Dark Bronze, detergent cleaned, prime coated. Chip resistant powder urethane polyester coating, electrostatic applied and baked.

**Photometric Information:** Contact factory.

**Labels:** U/L, CU/L listed suitable for wet location. I.B.E.W. labeled.



## APPLICATIONS

**Ideal for parking areas, entrances, walkways, underpasses, loading docks and tunnels.**



*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE*

## HOW TO ORDER

Catalog Number	Watts	Light Source
GSM30112	50	HPS
GSM30113	70	HPS
GSM30114*	100	HPS
GSM30115*	150	HPS
GSM30122	50	MH
GSM30123	70	MH
GSM30124	100	MH
GSM30125	150	MH
GSM30126	175	MH

\*120V only.

## DIMENSIONS

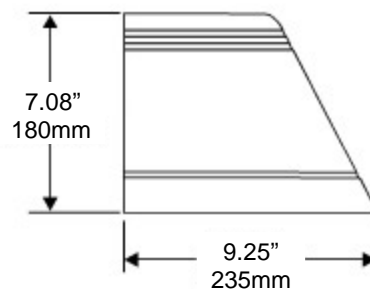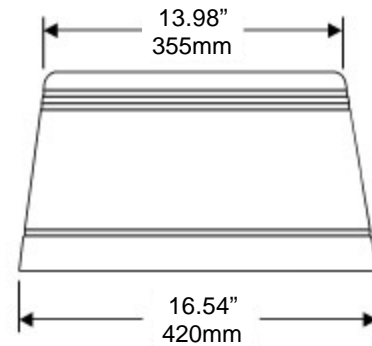

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505  
Phone: 773-427-7000 Fax: 800-217-1260 [www.escolighting.com](http://www.escolighting.com)

**A Woman-Owned Business**  
Established 1975

