




# GSM716<sup>SERIES</sup>

Sconce

Maximum 100 Watt Metal Halide  
And High Pressure Sodium  
PLT-42 Watt Compact Fluorescent

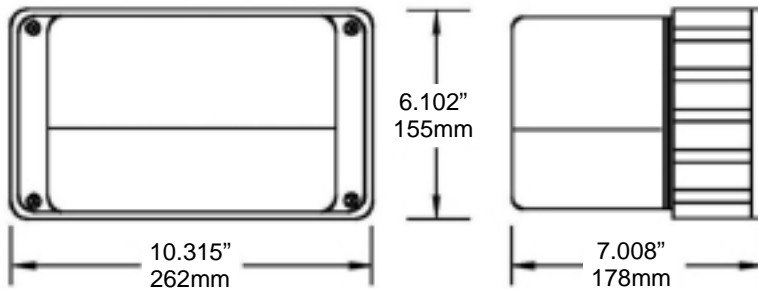

**Application:** Ideal for parking areas, entrances, walkways, underpasses, loading docks and recreation areas.

## Specifications

**Housing:** Heavy duty cast aluminum with corrosion resistant hardware. Dark bronze

**Lens:** Impact resistant polycarbonate with silicone rubber gasket.

**Reflector:** Specular aluminum, designed for maximum efficiency.

**Ballast (HID):** Pre-wired C.W.A., H.P.F. core and coil with capacitor.

**Ballast (CF):** H.P.F. electronic class P 120V—277V.

**Lamp (HID):** Clear medium base, (by others).

**Lamp (CF):** PLT26W, 32W or 42W (by others).

**Lamp Holder (HID):** High heat 4 K.V. rated, w/nickel plated copper screw shell, spring loaded center contact, lamp grips, SF-2 leads (200° C). Impregnated gasket.

**Lamp Holder (CF):** 26W and 32W GX24q-3 42W GX24q-4.

**Photometric Information:** Contact factory.

**Labels:** U/L, CU/L listed suitable for wet location. I.B.E.W. labeled.

*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE*

Catalog Number	Watts	Light Source
GSM71612*	50	HPS
GSM71613*	70	HPS
GSM71614*	100	HPS
GSM71622**	50	MH
GSM71623**	70	MH
GSM71624**	100	MH
GSM716T3	PLT-26	CF
GSM716T4	PLT-32	CF
GSM716T5	PLT-42	CF
GSM716CO12*	50	HPS
GSM716CO13*	70	HPS
GSM716CO14*	100	HPS
GSM716CO22**	50	MH
GSM716CO23**	70	MH
GSM716CO24**	100	MH
GSM716COT3	PLT-26	CF
GSM716COT4	PLT-32	CF
GSM716COT5	PLT-42	CF
GSM716UD12*	50	HPS
GSM716UD13*	70	HPS
GSM716UD14*	100	HPS
GSM716UD22**	50	MH
GSM716UD23**	70	MH
GSM716UD24**	100	MH
GSM716UDT3	PLT-26	CF
GSM716UDT4	PLT-32	CF
GSM716UDT5	PLT-42	CF

\*120V only. \*\*Open rated lamps only.