

**SPECIFICATIONS**

**Housing:** Die cast aluminum housing and door powder coat finished architectural bronze. Custom colors available. Contact factory. Stippled one piece aluminum reflector. Hinged door frame with two captive lock-up screws, one-piece silicone self-attaching door sealing gasket.

**Lens:** Impact resistant borosilicate glass refractor, silicone caulked to door frame.

**Ballast:** H.I.D., prewired C.W.A., H.P.F. core and coil with capacitor and starter for HPS.

**EZ5 Mounting System** allows the contractor to install the fixture in 5 minutes or less (see illustrated instructions below).

**Lamp:** Clear or phosphor coated (by others).

**Labels:** ETL, CETL listed suitable for wet location. I.B.E.W. labeled.

**Fixture Warranty:** The mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for five years from date of shipment from the factory.



*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE*

**Application:** Ideal for parking areas, entrances, walkways, underpasses, loading docks and tunnels.

**EZ5 Recessed Junction Box Installation:**

Cast aluminum mounting bracket factory installed. Universal cast aluminum gasketed junction box mounting bracket supports fixture and mounts to junction box. Fixture supplied with quick disconnect wiring harness for supply wire to fixture connection.






STEP 1. Connect quick connector to power supply.

STEP 2. Attach cast aluminum mounting plate on recessed j-box.

STEP 3. Connect quick connector from power source to fixture.

STEP 4. Hang wall pack on mounting plate.

STEP 5. Secure wall pack to mounting plate with locking screw.

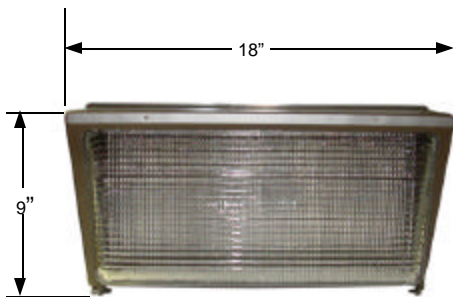

**WBE City of Chicago Certified**  
 3254 North Kilbourn Avenue Chicago, Illinois 60641-4505  
 Phone: 773-427-7000 Fax: 773-427-7007 [www.escolighting.com](http://www.escolighting.com)  
**Established 1975**



## HOW TO ORDER

Catalog Number	Watts	Light Source
WPR17BZ	250W	High Pressure Sodium
WPR18BZ	400W	High Pressure Sodium
WPR25BZ	150W	Metal Halide Pulse Start
WPR217BZ	175W	Metal Halide Pulse Start
WPR225BZ	250W	Metal Halide Pulse Start
WPR240BZ	400W	Metal Halide Pulse Start

## ACCESSORIES



**Photo Control**  
 Suffix Cat.# With

- 120 Volt =PC1
- 208-277 Volt =PC2
- 480 Volt =PC3



**Wireguard**  
 Suffix Catalog  
 Number With "WGP2"



**Fuse and Fuse Holder**  
 Suffix Catalog  
 Number With "F"

## PHOTOMETRICS



**WBE City of Chicago Certified**

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505  
 Phone: 773-427-7000 Fax: 773-427-7007 [www.escolighting.com](http://www.escolighting.com)  
**Established 1975**

