

**SPECIFICATIONS**

**Housing:** Die cast aluminum housing and door powder coat finished architectural bronze. Custom colors available. Contact factory. Stippled one piece aluminum reflector. Hinged door frame with two captive lock-up screws, one-piece silicone self-attaching door sealing gasket.

**Lens:** Impact resistant borosilicate glass refractor, silicone caulked to door frame.

**Ballast:** H.I.D., prewired C.W.A., H.P.F. core and coil with capacitor and starter for HPS.

**EZ5 Mounting System** allows the contractor to install the fixture in 5 minutes or less (see illustrated instructions below).

**Lamp:** Clear or phosphor coated (by others).

**Labels:** ETL, CETL listed suitable for wet location. I.B.E.W. labeled.

**Fixture Warranty:** The mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for five years from date of shipment from the factory.



*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE*

**Application:** Ideal for parking areas, entrances, walkways, underpasses, loading docks and tunnels.

**EZ5 Surface Power Supply Installation:** Factory installed 12 gauge steel wall mounting brackets with 4 keyhole slots, finished the same as the housing. Metal template for locating the mounting brackets. Factory installed junction splice box, tapped for either 1/2" or 3/4" (must specify) liquid-tight connector suitable for wet location.




STEP 1. Mark wall with supplied template.

STEP 2. Start fasteners in wall.

STEP 3. Hang wall pack using keyhole slots.

STEP 4. Secure to wall.

STEP 5. Connect wall pack external j-box.

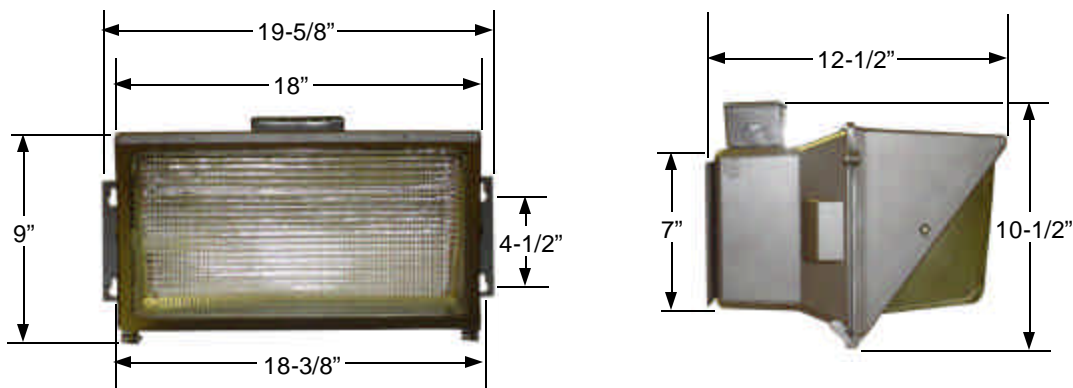

**WBE City of Chicago Certified**

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505  
 Phone: 773-427-7000 Fax: 800-217-1260 [www.escolighting.com](http://www.escolighting.com)  
**Established 1975**



**HOW TO ORDER**

Catalog Number	Watts	Light Source
WPS17BZ	250W	High Pressure Sodium
WPS18BZ	400W	High Pressure Sodium
WPS25BZ	150W	Metal Halide Pulse Start
WPS217BZ	175W	Metal Halide Pulse Start
WPS225BZ	250W	Metal Halide Pulse Start
WPS240BZ	400W	Metal Halide Pulse Start

**ACCESSORIES**



**Photo Control**  
 Suffix Cat.# With  
 120 Volt =PC1  
 208-277 Volt =PC2  
 480 Volt =PC3



**Wireguard**  
 Suffix Catalog  
 Number With "WGP2"



**Fuse and Fuse Holder**  
 Suffix Catalog  
 Number With "F"

**PHOTOMETRICS**



**WBE City of Chicago Certified**  
 3254 North Kilbourn Avenue Chicago, Illinois 60641-4505  
 Phone: 773-427-7000 Fax: 800-217-1260 [www.escolighting.com](http://www.escolighting.com)  
 Established 1975

