



SPECIFICATIONS

Ballast Housing: Die cast aluminum disc shaped housing twist locks and screw tightens to refractor collar. Internal induction generator. See finish note.

Refractor: Open aperture clear acrylic or polycarbonate prismatic 12-1/2" diameter refractor. Acrylic refractor also available in pearlescent blue*, pearlescent green*, pearlescent pink*, and pearlescent pearl*. Polycarbonate refractor available in vibrant blue*, vibrant green*, vibrant red*, and vibrant amber*.

Ballast: Induction high frequency electronic ballast 120V-277V.

Lamp: Circular induction electrodeless fluorescent lamp with average rated life of 100,000 hours.

Hook Mount Standard: Die cast hook with safety screw. Finished to match housing.

Optional Canopy Set: (Pendant Mount) 0-45° hang straight for 3/8" x 12" long steel pipe standard length with P2A accessory. Finished to match housing.**

Finish: Detergent cleaned with iron phosphate and chromic acid rust inhibitor. Chip resistant powder urethane polyester coating, electrostatic applied and baked. Standard color is white.

Labels: Suitable for damp location. ETL, CETL and I.B. E.W. labeled.

Fixture Warranty: The mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for five years from date of shipment from the factory. See general terms and conditions.

Photometric Information: Contact factory.

*Minimum order quantity of 10.

**Canopy set for indoor applications only; contact factory for other applications and designs.


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



Pendant Mounted

Hook Mounted

Dimensions

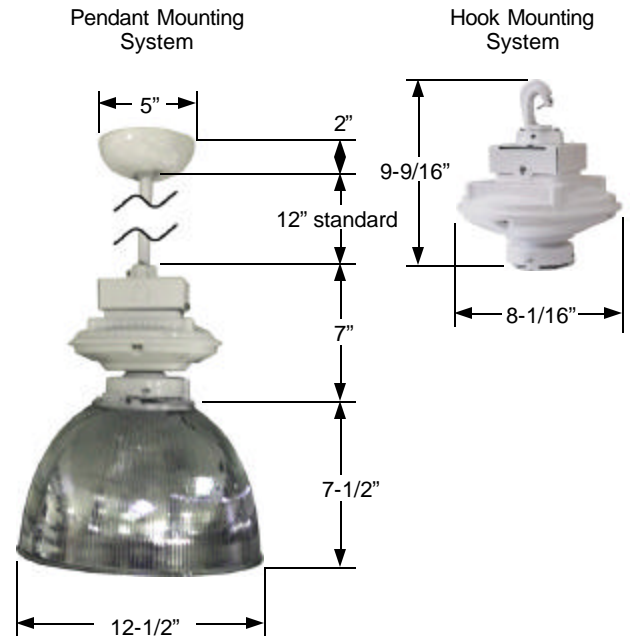




HOW TO ORDER

Acrylic Refractor

Catalog Number	Wattage	Initial Lumens	Efficacy (Lm/W)	Color Temp
Fi4135A	40	2800-3000	70-75	3500K
Fi4141A	40	2800-3000	70-75	4100K
Fi4150A	40	2800-3000	70-75	5000K
Fi4335A	70	4900-5250	70-75	3500K
Fi4341A	70	4900-5250	70-75	4100K
Fi4350A	70	4900-5250	70-75	5000K
Fi4435A	80	6000-6400	75-80	3500K
Fi4441A	80	6000-6400	75-80	4100K
Fi4450A	80	6000-6400	75-80	5000K
Fi4535A	100	7500-8000	75-80	3500K
Fi4541A	100	7500-8000	75-80	4100K
Fi4550A	100	7500-8000	75-80	5000K

Acrylic Refractor



Pearlescent Blue*
Add Suffix **AB**



Pearlescent Green*
Add Suffix **AG**




Pearlescent Pink*
Add Suffix **AP**



Pearlescent Pearl*
Add Suffix **AO**

* Minimum Order Quantity of 10



Hook Mount Cordsets

Catalog Suffix	Voltage	NEMA Configuration
HP-1	120	L5-15
HP-2	208/240	L6-15
HP-3	277	L7-15

EXAMPLE ORDER NUMBER: Fi4550ABFHP-1 = 100 watt induction system , 5000k, pearlescent blue acrylic refractor, fuse and fuse holder, hook mount with a 120v L5-15 cordset.

OPTIONS & ACCESSORIES

Fuse and Fuse Holder
Suffix Catalog Number With **F**



Pendant Mount Suffix

P2A=6" long stem (standard)
P2AX= "X" is stem length other than 6".



WBE City of Chicago Certified

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com
 Established 1975

