



SPECIFICATIONS

Cylinder: .080" thick aluminum rolled and seam welded. See finish note.

Reflector: .040" thick, spun aluminum polished to a specular finish, anodized and sealed.

Reflector Top: Aluminum coupler bracket. Internally mounted AC axial fan with die-cast aluminum housing, and thermoplastic impeller for maximum heat dissipation.

Baffle: One-piece spun aluminum finished matte black.

Ballast: Fulham induction electronic ballast 50/60Hz multi-tap 120-277V.

Lamp: Fulham High Horse induction electrodeless fluorescent lamp with average rated life of 100,000 hours. Standard color temperature is 5000K. Other color temperatures available. See table.

Mounting Pan: (Surface Mount) Cast aluminum with 3/4" inner collar, 16" dia. supplied with steel mounting strap to mount directly to outlet box. Supports pan with 4-1/4 x 20 threaded studs and nuts. Finished to match cylinder housing.

Canopy Set: (Pendant Mount) 8" steel canopy 0-45° hang straight for 3/4" I.P.. 12" long stem (standard) finished to match housing.*

Wall Bracket Assembly: (Wall Mount) One-piece cast aluminum bracket / arm assembly with access plate for wire inspection. Cast aluminum, wall mounting plate with 1/4" thick neoprene gasket. Quick disconnect wiring harness. Esco's EZ5® Mounting System allows the contractor to install the fixture in 5 minutes or less. Finished same as housing. See finish note.

Finish: Detergent cleaned with iron phosphate and chromic acid rust inhibitor. Chip resistant powder urethane polyester coating, electrostatic applied and baked. Standard colors are textured black, textured bronze and white. Custom colors are available. Consult factory or sales representative.

Labels: Surface and wall mount suitable for wet location; pendant mount suitable for damp location. ETL, CETL and I.B.E.W. labeled.

Fixture Warranty: The mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for ten years from date of shipment from the factory. See general terms and conditions.

Maximum Ambient Temperature: Maximum 109°F.


Photometric Information: Contact factory.

*Canopy set for indoor applications only; contact factory for other applications and designs.


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



DIMENSIONS

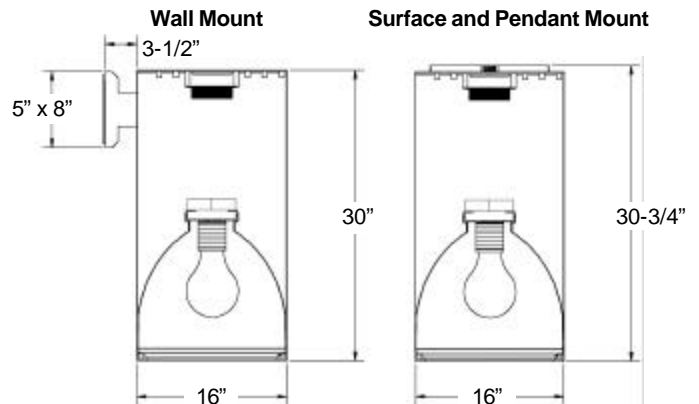

PHOTOMETRICS




WBE City of Chicago Certified


3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com
 Established 1975





HOW TO ORDER

Open Downlight	Surface Mount	Lamp	System Watts	Color Temp	Initial Lumens
	SAFZ70927	165w	173w	2700k	11550
	SAFZ70930	165w	173w	3000k	11550
	SAFZ70935	165w	173w	3500k	11550
	SAFZ70940	165w	173w	4000k	11550
	SAFZ70941	165w	173w	4100k	11550
	SAFZ70950	165w	173w	5000k	11550
	SAFZ70960	165w	173w	6000k	11550
	SAFZ70965	165w	173w	6500k	11550

Step Splayed Black Baffle	Surface Mount	Lamp	System Watts	Color Temp	Initial Lumens
	SAFZ72927	165w	173w	2700k	11550
	SAFZ72930	165w	173w	3000k	11550
	SAFZ72935	165w	173w	3500k	11550
	SAFZ72940	165w	173w	4000k	11550
	SAFZ72941	165w	173w	4100k	11550
	SAFZ72950	165w	173w	5000k	11550
	SAFZ72960	165w	173w	6000k	11550
	SAFZ72965	165w	173w	6500k	11550

EXAMPLE ORDER NUMBER: WFZ72930BL = Wall mount, 165 watt lamp, 3000k, with step splayed black baffle, textured black.

OPTIONS & ACCESSORIES

Wall Mount Prefix

Change **SA** prefix in catalog number to **W**

Pendant Mount Suffix

P1=12" long stem (standard)
P1X= "X" is stem length other than 12"



Fuse and Fuse Holder

Suffix Catalog Number With **F**



Color Suffix BZ= Textured Bronze, BL= Textured Black, W= Sky White.

WBE City of Chicago Certified

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com
 Established 1975

