



SPECIFICATIONS

Mounting Frame: 18 gauge (.048") galvanized steel die formed universal mounting frame fits most ceiling systems; minimum 1/2", maximum, 2" thick. Thru way splice box.

Reflector: Spun aluminum #3002, .050" thick specular finish. Consult factory for other finishes.

Ballast: Compact fluorescent electronic high power factor class P, universal voltage 120 thru 277 volt; 50/60 Hz.

Reflector Top: Extruded aluminum, supports socket. Dissipates heat from lamp and socket.

Lamp: Compact fluorescent PLT lamp max. 57W, 4 pin base (by others).




Lamp Holder: Vertically mounted white thermo-plastic with snap-in lamp retainer springs. See table.

Labels: ETL, CETL listed, suitable for wet location under covered ceiling. I.B.E.W. labeled.

Fixture Warranty: The fixture mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for five years from date of shipment from the factory. See General Terms and Conditions.


Photometric Information: Contact factory.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

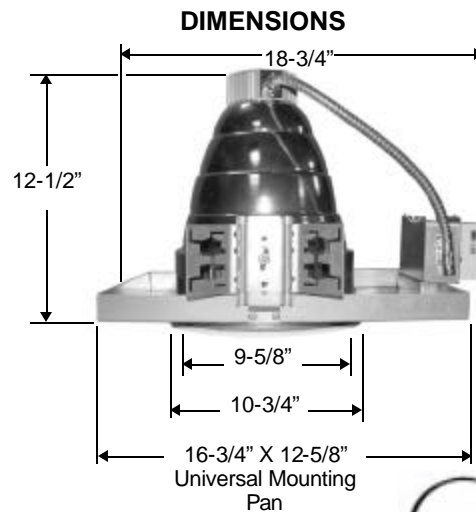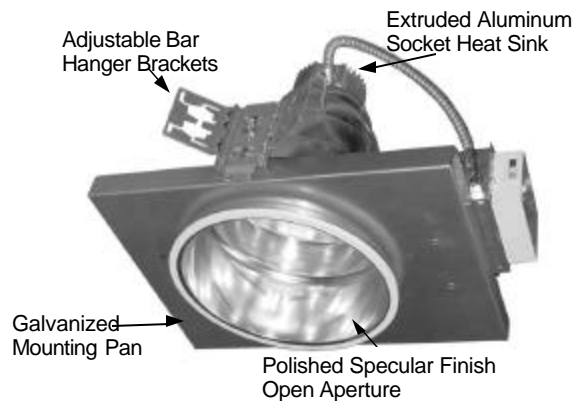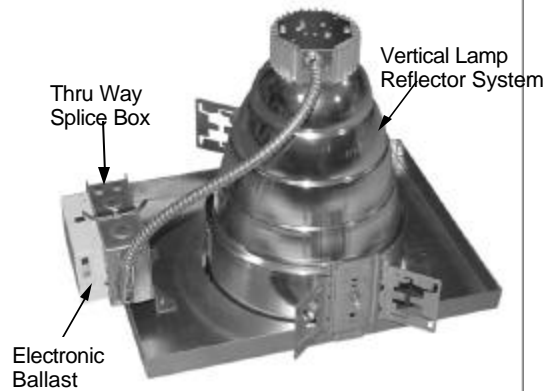






WBE City of Chicago Certified

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com
 Established 1975



HOW TO ORDER

<p>ARCHITECTURAL OPEN DOWNLIGHT</p> 	<table border="0"> <thead> <tr> <th>Catalog Number</th> <th>Watts</th> <th>Lamp Base</th> </tr> </thead> <tbody> <tr> <td>RC15010T3</td> <td>26</td> <td>GX24q-3</td> </tr> <tr> <td>RC15010T4</td> <td>32</td> <td>GX24q-3</td> </tr> <tr> <td>RC15010T5</td> <td>42</td> <td>GX24q-4</td> </tr> <tr> <td>RC15010T6</td> <td>57</td> <td>GX24q-5</td> </tr> </tbody> </table>	Catalog Number	Watts	Lamp Base	RC15010T3	26	GX24q-3	RC15010T4	32	GX24q-3	RC15010T5	42	GX24q-4	RC15010T6	57	GX24q-5	<p>DOWNLIGHT WITH TEMPERED PRISMATIC GLASS LENS AND SPLAYED STEPPED BAFFLE</p> 	<table border="0"> <thead> <tr> <th>Catalog Number</th> <th>Watts</th> <th>Lamp Base</th> </tr> </thead> <tbody> <tr> <td>RC15510T3</td> <td>26</td> <td>GX24q-3</td> </tr> <tr> <td>RC15510T4</td> <td>32</td> <td>GX24q-3</td> </tr> <tr> <td>RC15510T5</td> <td>42</td> <td>GX24q-4</td> </tr> <tr> <td>RC15510T6</td> <td>57</td> <td>GX24q-5</td> </tr> </tbody> </table>	Catalog Number	Watts	Lamp Base	RC15510T3	26	GX24q-3	RC15510T4	32	GX24q-3	RC15510T5	42	GX24q-4	RC15510T6	57	GX24q-5
Catalog Number	Watts	Lamp Base																															
RC15010T3	26	GX24q-3																															
RC15010T4	32	GX24q-3																															
RC15010T5	42	GX24q-4																															
RC15010T6	57	GX24q-5																															
Catalog Number	Watts	Lamp Base																															
RC15510T3	26	GX24q-3																															
RC15510T4	32	GX24q-3																															
RC15510T5	42	GX24q-4																															
RC15510T6	57	GX24q-5																															
<p>ARCHITECTURAL OPEN DOWNLIGHT WITH MINI-GROOVE BAFFLE</p> 	<table border="0"> <thead> <tr> <th>Catalog Number</th> <th>Watts</th> <th>Lamp Base</th> </tr> </thead> <tbody> <tr> <td>RC15110T3</td> <td>26</td> <td>GX24q-3</td> </tr> <tr> <td>RC15110T4</td> <td>32</td> <td>GX24q-3</td> </tr> <tr> <td>RC15110T5</td> <td>42</td> <td>GX24q-4</td> </tr> <tr> <td>RC15110T6</td> <td>57</td> <td>GX24q-5</td> </tr> </tbody> </table>	Catalog Number	Watts	Lamp Base	RC15110T3	26	GX24q-3	RC15110T4	32	GX24q-3	RC15110T5	42	GX24q-4	RC15110T6	57	GX24q-5	<p>DOWNLIGHT WITH C#73 TEMPERED PRISMATIC GLASS LENS AND SPLAYED WHITE BAFFLE</p> 	<table border="0"> <thead> <tr> <th>Catalog Number</th> <th>Watts</th> <th>Lamp Base</th> </tr> </thead> <tbody> <tr> <td>RC15810T3</td> <td>26</td> <td>GX24q-3</td> </tr> <tr> <td>RC15810T4</td> <td>32</td> <td>GX24q-3</td> </tr> <tr> <td>RC15810T5</td> <td>42</td> <td>GX24q-4</td> </tr> <tr> <td>RC15810T6</td> <td>57</td> <td>GX24q-5</td> </tr> </tbody> </table>	Catalog Number	Watts	Lamp Base	RC15810T3	26	GX24q-3	RC15810T4	32	GX24q-3	RC15810T5	42	GX24q-4	RC15810T6	57	GX24q-5
Catalog Number	Watts	Lamp Base																															
RC15110T3	26	GX24q-3																															
RC15110T4	32	GX24q-3																															
RC15110T5	42	GX24q-4																															
RC15110T6	57	GX24q-5																															
Catalog Number	Watts	Lamp Base																															
RC15810T3	26	GX24q-3																															
RC15810T4	32	GX24q-3																															
RC15810T5	42	GX24q-4																															
RC15810T6	57	GX24q-5																															
<p>DOWNLIGHT WITH TEMPERED PRISMATIC GLASS LENS</p> 	<table border="0"> <thead> <tr> <th>Catalog Number</th> <th>Watts</th> <th>Lamp Base</th> </tr> </thead> <tbody> <tr> <td>RC15210T3</td> <td>26</td> <td>GX24q-3</td> </tr> <tr> <td>RC15210T4</td> <td>32</td> <td>GX24q-3</td> </tr> <tr> <td>RC15210T5</td> <td>42</td> <td>GX24q-4</td> </tr> <tr> <td>RC15210T6</td> <td>57</td> <td>GX24q-5</td> </tr> </tbody> </table>	Catalog Number	Watts	Lamp Base	RC15210T3	26	GX24q-3	RC15210T4	32	GX24q-3	RC15210T5	42	GX24q-4	RC15210T6	57	GX24q-5																	
Catalog Number	Watts	Lamp Base																															
RC15210T3	26	GX24q-3																															
RC15210T4	32	GX24q-3																															
RC15210T5	42	GX24q-4																															
RC15210T6	57	GX24q-5																															

OPTIONS AND ACCESSORIES

Aperture Accessories



Louver Guard Suffix catalog number with **LG3**
Example: RC15010T3 becomes RC15010T3LG3



10° Slope Adaptor Suffix catalog number with **SA310**
Example: RC15010T3 becomes RC15010T3SA110



20° Slope Adaptor Suffix catalog number with **SA320**
Example: RC15010T3 becomes RC15010T3SA120



30° Slope Adaptor Suffix catalog number with **SA330**
Example: RC15010T3 becomes RC15010T3SA130

Ballast Options



Dimming Ballast Suffix catalog number with **DM**
Example: RC15010T3 becomes RC15010T3DM



Emergency Ballast Suffix catalog number with **EM**
Example: RC15010T3 becomes RC15010T3EM



Remote Emergency Ballast Suffix catalog number with **RMEM**
Example: RC15010T3 becomes RC15010T3RMEM

Other



Photo Control Suffix Catalog number with
 120 Volt = **PC4**
 208-277 Volt = **PC5**
Example: RC15010T3 becomes RC15010T3PC5



Fuse and Fuse Holder Suffix Catalog Number With **F**
Example: RC15010T3 becomes RC15010T3F



WBE City of Chicago Certified

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com
 Established 1975

