



SPECIFICATIONS

Universal Mounting Frame: 18 gauge (.048") galvanized steel die formed universal mounting frame. Feed thru junction box maximum of 8 number 12 AWG branch circuit conductors suitable for at least 60°C permitted in box.

Aluminum Housing: Die formed 0.50" thick aluminum housing and cover encloses optical assembly and fan prevents contaminants.

Reflector: Spun aluminum .063" thick, #3002, polished to a specular finish.

Reflector Top: Perforated .040" aluminum socket box with internal 0.125" Aluminum coupler bracket. internally mounted AC axial fan with die-cast aluminum housing, and thermoplastic impeller for maximum heat dissipation.

Ballast: 165 watt induction high frequency electronic ballast. Operating in a range of 120 - 277 volts, 50 or 60 Hz.

Lamp: 165 watt induction electrodeless fluorescent lamp with average rated life 100,000 hours.

Trim Frame: Cast aluminum, gasketed, torsion spring lock-up. Finished Matte White. See finish note.

Fixture Warranty: defective material and workmanship, under normal installation and operating conditions, for five years from date of shipment from the factory. See general terms and conditions

Labels: ETL / CETL listed, suitable for damp location & I.B.E.W. labeled.

Maximum Ambient Temperature: Maximum 105°F.


Photometric Information: Contact factory.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


Maximum Operating Ambient Temperature 40.5°C or 105°F



DIMENSIONS

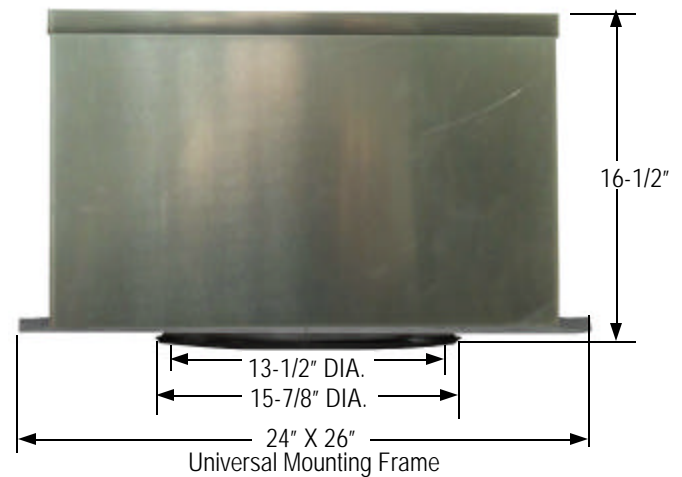

PHOTOMETRICS

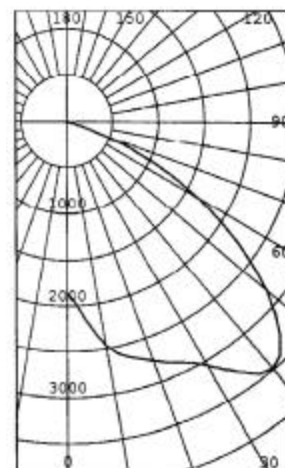

WBE City of Chicago Certified

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com
Established 1975





HOW TO ORDER

Architectural Open Downlight



Catalog Number	Lamp	Color Temp	Initial Lumens	CRI
RFZ30935	165w	3500K	11550	80
RFZ30941	165w	4100K	11550	80
RFZ30950	165w	5000K	11550	80

Mini-Groove Black Baffle



Catalog Number	Lamp	Color Temp	Initial Lumens	CRI
RFZ31935	165w	3500K	11550	80
RFZ31941	165w	4100K	11550	80
RFZ31950	165w	5000k	11550	80

Voltage Suffix

- 1=120V
- 2=208V
- 3=240V
- 4=277V


EXAMPLE ORDER NUMBER: RFZ31950F-1 = Mini-groove aluminum black baffle, 165 watt induction lamp, 5000k, fuse and fuse holder, 120 volt.

ACCESSORIES



Fuse and Fuse Holder
 Suffix Catalog Number With "F"

Louver Guard
 Suffix Catalog Number With LG3



WBE City of Chicago Certified
 3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com
Established 1975

