

SPECIFICATIONS

Housing: Spun aluminum .090" thick. See Finish Note.

Reflector: Single lamp fluorescent: spun aluminum .040" thick, finished bright anodized. Twin lamp fluorescent: 20 gauge C.R.S. finished high gloss white.

Ballast: Compact fluorescent electronic high power factor class P, universal voltage 120 thru 277 volt; 50/60Hz..

Lamp: See "How to Order" chart (by others).

Lamp Holder: Compact fluorescent base (see How to order chart).

Lens: Prismatic acrylic, polycarbonate or heat resistant high impact borosilicate glass refractor.

Lens Frame: Injection molded nylon ring, gasketed, retains lens. Spun aluminum for glass refractor. Torsion spring lock-up with safety chain.

Cross Bar: 4" Long, tapped 3/8" I.P.S. galvanized steel. Surface mount only.

Quick Connect Box: 16 Gauge (.059") galvanized steel finished to match housing. See finish note.

Canopy Set: (Pendant Mount) 0-45° hang straight for 3/8" x 12" long steel pipe standard length with P2 accessory. Finished to match housing.**

Wall Bracket Assembly: One-piece cast aluminum bracket/arm assembly with access plate for wire inspection. Cast aluminum, wall mounting plate with 1/4" thick neoprene gasket. Quick disconnect wiring harness. Escos' **EZ5 Mounting System** allows the contractor to install the fixture in 5 minutes or less. Finished same as housing. See finish note.

Finish: All painted parts are washed in alkaline solution, rinsed in an iron phosphate, baked dry, then painted with a TGIC polyester powder coating electrostatic applied and baked.

Labels: Surface and wall mount suitable for wet location; pendant mount suitable for damp location. ETL, CETL and I.B.E.W. labeled.

Photometric Information: Contact factory.


Fixture Warranty: The fixture mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for ten years from date of shipment from the factory. See General Terms and Conditions.

**Canopy set for indoor applications only; contact factory for other applications and designs.



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

DIMENSIONS

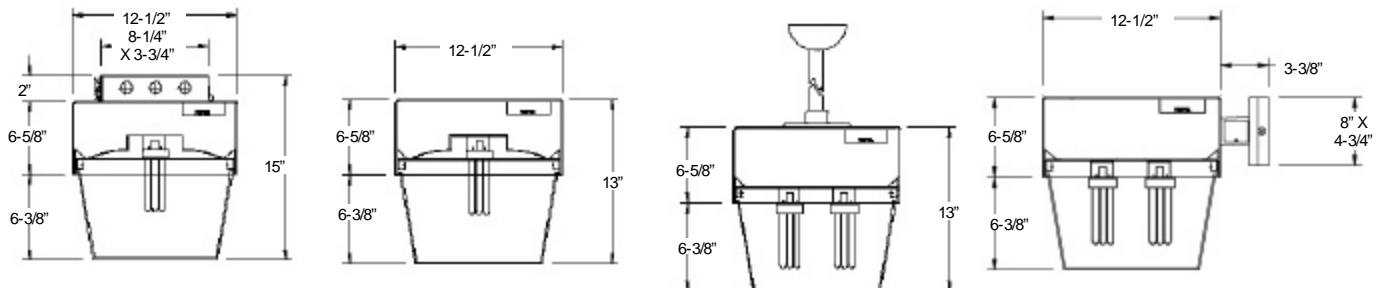

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com

A Woman-Owned Business
Established 1975



HOW TO ORDER

Prismatic Acrylic	Mounting System	Lamp Base	Watts	Prismatic Polycarbonate	Mounting System	Lamp Base	Watts	Prismatic Borosilicate Glass	Mounting System	Lamp Base	Watts
S403D18	Surface	G24q-2	1-18	S413D18	Surface	G24q-2	1-18	S423D18	Surface	G24q-2	1-18
S403D218	Surface	G24q-2	2-18	S413D218	Surface	G24q-2	2-18	S423D218	Surface	G24q-2	2-18
S403DL26	Surface	G24q-3	1-26	S413DL26	Surface	G24q-3	1-26	S423DL26	Surface	G24q-3	1-26
S403D226	Surface	G24q-3	2-26	S413D226	Surface	G24q-3	2-26	S423D226	Surface	G24q-3	2-26
S403T26	Surface	GX24q-3	1-26	S413T26	Surface	GX24q-3	1-26	S423T26	Surface	GX24q-3	1-26
S403T226	Surface	GX24q-3	2-26	S413T226	Surface	GX24q-3	2-26	S423T226	Surface	GX24q-3	2-26
S403T32	Surface	GX24q-3	1-32	S413T32	Surface	GX24q-3	1-32	S423T32	Surface	GX24q-3	1-32
S403T232	Surface	GX24q-3	2-32	S413T232	Surface	GX24q-3	2-32	S423T232	Surface	GX24q-3	2-32
S403T42	Surface	GX24q-4	1-42	S413T42	Surface	GX24q-4	1-42	S423T42	Surface	GX24q-4	1-42
S403T242	Surface	GX24q-4	2-42	S413T242	Surface	GX24q-4	2-42	S423T242	Surface	GX24q-4	2-42
W403D18	Wall	G24q-2	1-18	W413D18	Wall	G24q-2	1-18	W423D18	Wall	G24q-2	1-18
W403D218	Wall	G24q-2	2-18	W413D218	Wall	G24q-2	2-18	W423D218	Wall	G24q-2	2-18
W403DL26	Wall	G24q-3	1-26	W413DL26	Wall	G24q-3	1-26	W423DL26	Wall	G24q-3	1-26
W403D226	Wall	G24q-3	2-26	W413D226	Wall	G24q-3	2-26	W423D226	Wall	G24q-3	2-26
W403T26	Wall	GX24q-3	1-26	W413T26	Wall	GX24q-3	1-26	W423T26	Wall	GX24q-3	1-26
W403T226	Wall	GX24q-3	2-26	W413T226	Wall	GX24q-3	2-26	W423T226	Wall	GX24q-3	2-26
W403T32	Wall	GX24q-3	1-32	W413T32	Wall	GX24q-3	1-32	W423T32	Wall	GX24q-3	1-32
W403T232	Wall	GX24q-3	2-32	W413T232	Wall	GX24q-3	2-32	W423T232	Wall	GX24q-3	2-32
W403T42	Wall	GX24q-4	1-42	W413T42	Wall	GX24q-4	1-42	W423T42	Wall	GX24q-4	1-42
W403T242	Wall	GX24q-4	2-42	W413T242	Wall	GX24q-4	2-42	W423T242	Wall	GX24q-4	2-42

Color Suffix

BZ= Textured Bronze

BL= Textured Black

W=Sky White

Other Consult
Factory

Mounting Options Suffix catalog number with:

B= Quick connect splice box.

P7x= Pendant and canopy mount
(x = required stem length in inches).

Voltage Suffix

1= 120V

2= 208V

3= 240V

4= 277V

5= 480V

8= Multi-Tap wired for 277V

9= Multi-Tap unwired

0= 347V

EXAMPLE: S4122BLP724-1 = Surface mount, prismatic polycarbonate lens, 50 watt metal halide, textured black, pendant mount with 24" stem, 120V.



3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com

A Woman-Owned Business
Established 1975

