

SPECIFICATIONS

Housing: Die formed .063" aluminum construction. Seam welded, seals housing from contamination. Mounting collar provided on surface mount for easy fixture installation (see detail). See finish note.

Reflector: .032" Aluminum. Specular aluminum (95% reflectance) Alanod mirror material.

Door Frame: One piece die formed .63" aluminum with (6) captive fasteners and two stainless steel safety wires. See Finish Note.

Trunion Mount Option: 14 GA. (.074") Galvanized steel. 180° Pivot and lock into position. See finish note.

Lens: Prismatic C73 tempered glass, clear tempered glass. All lenses silicone caulked into door frame.

Ballast: H.I.D.: pre-wired C.W.A., H.P.F. core and coil with capacitor.

Lamp: H.I.D.: Clear medium or mogul base. (by others).

Finish: Detergent cleaned with iron phosphate and chromic acid rust inhibitor. Chip resistant TGIC powder urethane polyester coating, electrostatic applied and baked. Standard color textured bronze, black or sky white. Other colors available.

Labels: ETL / CETL listed, suitable for wet location, I.B.E.W. assembled and labeled.

Fixture Warranty: The fixture mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for five years from date of shipment from the factory. See General Terms and Conditions.

Photometric Information: Contact factory or visit www.escolighting.com.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE




Clear tempered glass lens,
Shown with trunion mount option.



Prismatic C73 tempered glass lens,
Shown with collar mount option.

DIMENSIONS

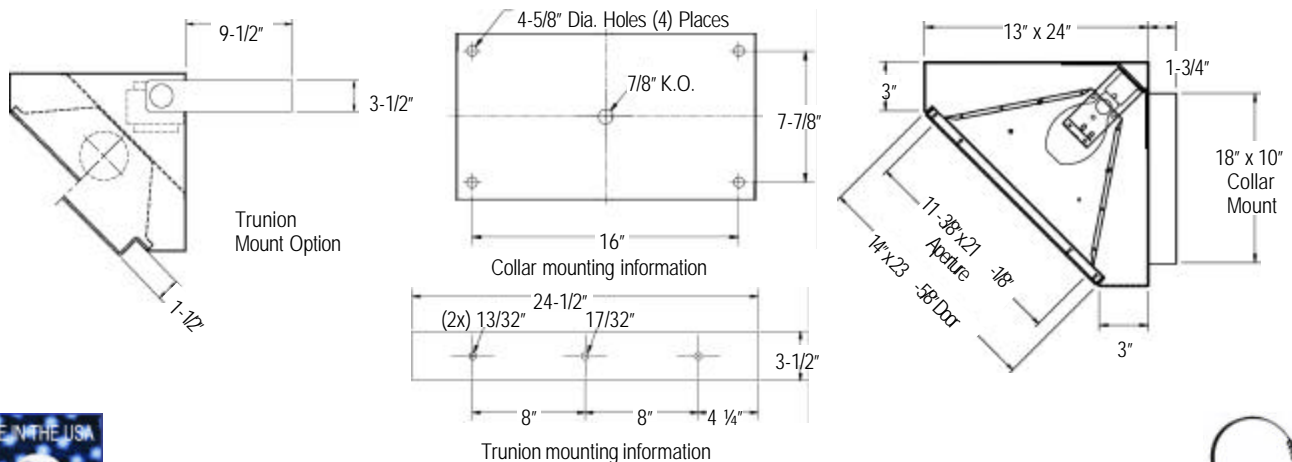


WBE City of Chicago Certified

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com
Established 1975



HOW TO ORDER

Wall or ceiling mount	Lens	Lamp	Watts	Trunion Mount	Lens	Lamp	Watts
SCRS015	Clear Tempered glass lens	H.P.S.	150	SCRT015	Clear Tempered glass lens	H.P.S.	150
SCRS115	Tempered prismatic #73 lens	H.P.S.	150	SCRT115	Tempered prismatic #73 lens	H.P.S.	150
SCRS017	Clear Tempered glass lens	H.P.S.	250	SCRT017	Clear Tempered glass lens	H.P.S.	250
SCRS117	Tempered prismatic #73 lens	H.P.S.	250	SCRT117	Tempered prismatic #73 lens	H.P.S.	250
SCRS0215	Clear Tempered glass lens	Metal Halide	150	SCRT0215	Clear Tempered glass lens	Metal Halide	150
SCRS1215	Tempered prismatic #73 lens	Metal Halide	150	SCRT1215	Tempered prismatic #73 lens	Metal Halide	150
SCRS026	Clear Tempered glass lens	Metal Halide	175	SCRT026	Clear Tempered glass lens	Metal Halide	175
SCRS126	Tempered prismatic #73 lens	Metal Halide	175	SCRY126	Tempered prismatic #73 lens	Metal Halide	175
SCRS027	Clear Tempered glass lens	Metal Halide	250	SCRT027	Clear Tempered glass lens	Metal Halide	250
SCRS127	Tempered prismatic #73 lens	Metal Halide	250	SCRT127	Tempered prismatic #73 lens	Metal Halide	250

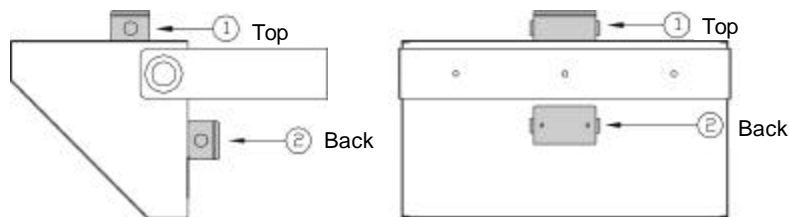

When ordering the trunion mount specify junction box location (1, or 2) and threaded hub size (1/2", 3/4" or 1").

EXAMPLE: SCRT1215=Trunion mounted, Tempered prismatic #73 lens, with 150W Metal Halide lamp.



WBE City of Chicago Certified

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com
 Established 1975

