



SPECIFICATIONS

Housing: Die cast aluminum housing and hinged door frame and sheild with two captive lock-up screws. Die cast aluminum lens frame. See finish note.

Lens: Flat tempered clear glass lens.

Reflector: Two piece stippled aluminum, designed for maximum efficiency.

Ballast: Induction high frequency electronic ballast 120V, 220V, 277V or 347V, 50-60Hz. Contact factory for other voltages.

EZ5 Mounting System allows the contractor to install the fixture in 5 minutes or less (see illustration below).

Lamp: 80 watt Induction electrodeless fluorescent lamp with average rated life 100,000 hours.

Finish: Powder coat finish over a chromate conversion coating. Standard color is Architectural Bronze. Custom colors available. Contact factory.

Labels: ETL, CETL listed suitable for wet location. I.B.E.W. labeled.

Fixture Warranty: The mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for five years from date of shipment from the factory. All induction system components are warranted by the original manufacturer of the induction lighting system components, and subject to that manufacturer's warranty.

Photometric Information: Contact factory.



Application: Ideal for parking areas, entrances, walkways, underpasses, loading docks and tunnels.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

EZ5 Recessed Junction Box Installation:

Cast aluminum mounting bracket factory installed. Universal cast aluminum gasketed junction box mounting bracket supports fixture and mounts to junction box. Fixture supplied with quick disconnect wiring harness for supply wire to fixture connection.




STEP 1. Connect quick connector to power supply.

STEP 2. Attach cast aluminum mounting plate on recessed j-box.

STEP 3. Connect quick connector from power source to fixture.

STEP 4. Hang wall pack on mounting plate.

STEP 5. Secure wall pack to mounting plate with locking screw.

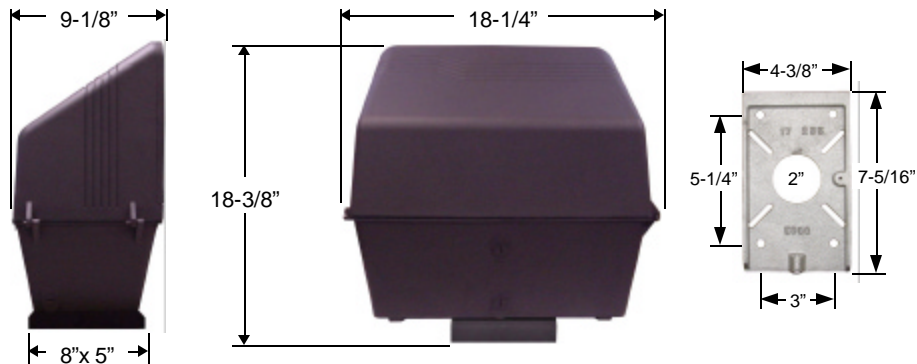

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com

A Woman-Owned Business
Established 1975



esco


LIGHTING, INC.

SP2824R
Five Minute Installation Wall Pack
EZ5 Mounting System
For Recessed Power Supply Installations
Induction Lamp
With Average Rated Life of 100,000 Hours



HOW TO ORDER

| Catalog Number | Lamp | Lumens | Color Temp | System Watts |
|----------------|---------|--------|------------|--------------|
| SP2824R | 80 watt | 6400 | 5000 | 86 |

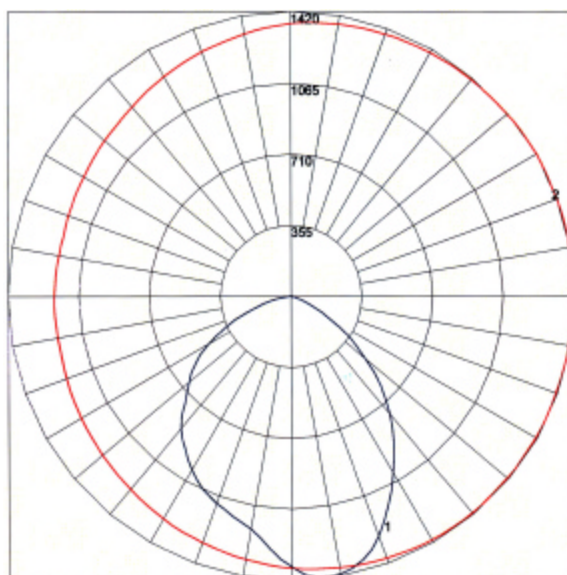

OPTIONS & ACCESSORIES



Photo Control
 Suffix Cat.# With
 120 Volt = **PC1**
 208-277 Volt = **PC2**



Fuse and Fuse Holder
 Suffix Catalog Number With "F"



3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com

A Woman-Owned Business
 Established 1975

