

SPECIFICATIONS

Cylinder Extruded aluminum 6063-T5, .110" thick, seamless design. See finish note.

Trim Frame Die cast aluminum locks up to cylinder with (4) flat head machine screws. Two 1 inch vented plugs dissipate heat insures maximum lamp life. Finished to match cylinder. See finish note.

Reflector Spun aluminum alloy 3002, electro-chemically processed to provide specular finish.

Baffle 8" diameter spun aluminum grooved baffle. Finished matte black.

Ballast Electronic ballast, input voltage 108-305V, 50/60 HzUL Listed, Type 1, thermally protected, FCC 47CFR Part 18 Non-Consumer, Sound Rated A, ANSI C62.41 Cat. A transient protection.

Lamp 70 watt PAR, phosphor coated medium base (by others).

Lamp Holder High heat porcelain, 4 KV rated with nickel plated copper screw shell, spring loaded center contact, lamp grips, SF-2 leads (200° C). Impregnated gasket.

Trunnion Mounting System 14 ga. cold rolled steel. Trunnion locks in place with two dished toothed periphery lock washers and polypropylene five arm knobs. Finished same as housing. See finish note.


Finish Detergent cleaned with iron phosphate and chromic acid rust inhibitor. Chip resistant powder urethane polyester coating, electrostatic applied and baked. Standard colors are textured bronze and white. Custom colors are available. Consult factory or sales representative.

Labels Trunnion mount suitable for damp location under covered ceiling. ETL, CETL and I.B.E.W. assembled and labeled.

Fixture Warranty The mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for ten years from date of shipment from the factory. See general terms and conditions.


Photometric Information Contact factory.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

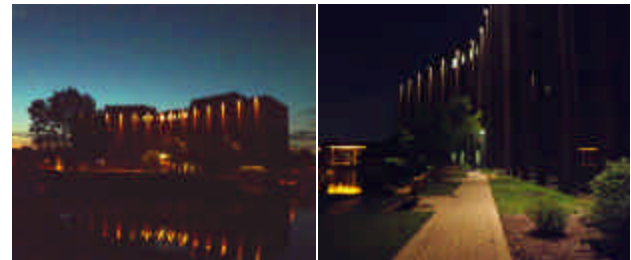

Installation with PAR30LN

Dimensions

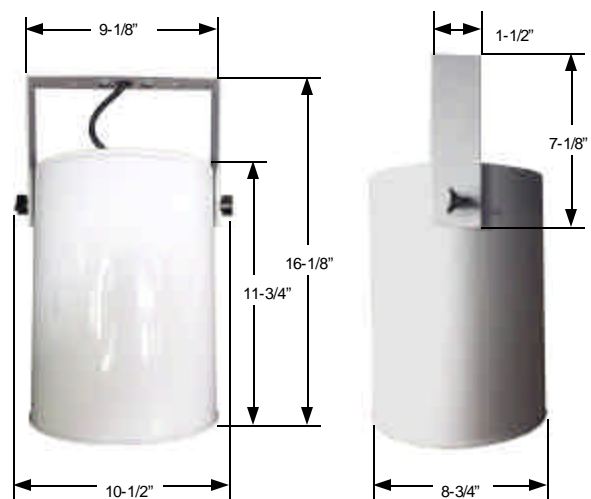

WBE City of Chicago Certified

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com
Established 1975







HOW TO ORDER



Catalog Number	Mounting System	Maximum Lamp Wattage
TX61238	Trunnion Mount	70 watt maximum lamp

OPTIONS AND ACCESSORIES

	Photo Control* Suffix Catalog number with 120 Volt = PC4 208-277 Volt = PC5 Example: TX61238 becomes : TX61238PC4
	Fuse and Fuse Holder* Suffix Catalog Number With F Example: TX61238 becomes TX61238F

*120 or 277 volt must be specified when ordering a Photo Control or Fuse and Fuse Holder.

Voltage Suffix 120v = -1, 277v = -4

Finish Color Options Textured Bronze=**BZ**, White=**W**

EXAMPLE ORDER NUMBER: TX61238FBL-1 = Trunnion mount, 70 watt, 5000k, fuse and fuse holder, textured black, 120 volt.



WBE City of Chicago Certified

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com
Established 1975

