

SPECIFICATIONS

Cylinder: Aluminum .063 thick, rolled and butt welded for seamless construction.

Cylinder Aperture Top: Spun aluminum door frame .050" aluminum with clear tempered lens caulked to frame.

Cylinder Aperture Bottom: Cast aluminum door frame with clear tempered lens. Other lens options available. Contact factory.

Reflector: 16" GA (.063") spun aluminum #3002, polished to mirror finish then electro-chemically processed to provide specular finish.

Ballast: Prewired H.P.F., core and coil with capacitor, mounted on aluminum mounting plate.

Lamps: Mogul base, phosphor coated.(By others). See table.

Lamp Holder: Hi-heat porcelain mogul base sockets with nickel plated copper screws shell, spring loaded center contact, lamp grips, SF-2 leads (200degree C) impregnated gasket.

Lens: See HOW TO ORDER.

Mounting Plate: Aluminum bolts directly to outlet box supports ballast assemblies and fits to wall bracket.

Wall Bracket: Aluminum construction bracket/arm assembly. Fits over ballast wall mounting plate. Quick disconnect wiring harness. See finish note.

Finish: Bronze (BZ) or white (W), detergent cleaned with iron phosphate and chromic acid rust inhibitor. Chip resistant powder urethane polyester coating, electro-static applied and baked

Labels: Wall mount suitable for wet location. ETL, CETL and I.B.E.W. labeled.


Fixture Warranty: The fixture mechanics are guaranteed to be free from defective material and workmanship, under normal Installation and operating conditions, for ten years from date of shipment from the factory. See General Terms and Conditions.

Photometric Information: Contact factory.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



Dimensions:

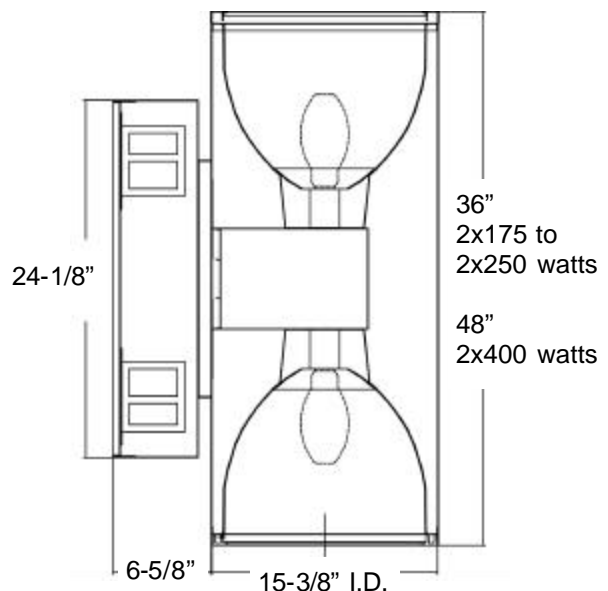

WBE City of Chicago Certified

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com
Established 1975

10/08



HOW TO ORDER



| | Watts | Lamp | Height |
|---|-------|------|--------|
| LOW BRIGHTNESS OPEN DOWNLIGHT W27026 | 175 | MH | 36" |
| W27027 | 250 | MH | 36" |
| W27028 | 400 | MH | 48" |



| | Watts | Lamp | Height |
|--|-------|------|--------|
| CORNING #73 PRISMATIC GLASS LENS W27126 | 175 | MH | 36" |
| W27127 | 250 | MH | 36" |
| W27128 | 400 | MH | 48" |



| | Watts | Lamp | Height |
|------------------------------------|-------|------|--------|
| OPEN WITH STEPPED BAFFLE W27226 | 175 | MH | 36" |
| W27227 | 250 | MH | 36" |
| W27228 | 400 | MH | 48" |



| | Watts | Lamp | Height |
|---|-------|------|--------|
| OPEN WITH MULTIPLIER CONE REFLECTOR W27326 | 175 | MH | 36" |
| W27327 | 250 | MH | 36" |
| W27328 | 400 | MH | 48" |



| | Watts | Lamp | Height |
|--|-------|------|--------|
| FRESNEL GLASS LENS WITH SPLAYED STEPPED BAFFLE W27426 | 175 | MH | 36" |
| W27427 | 250 | MH | 36" |
| W27428 | 400 | MH | 48" |



| | Watts | Lamp | Height |
|---|-------|------|--------|
| CORNING #73 PRISMATIC TEMPERED GLASS LENS WITH SPLAYED STEPPED BAFFLE W27526 | 175 | MH | 36" |
| W27527 | 250 | MH | 36" |
| W27528 | 400 | MH | 48" |



| | Watts | Lamp | Height |
|---|-------|------|--------|
| FRESNEL GLASS LENS WITH MULTIPLIER CONE REFLECTOR W27626 | 175 | MH | 36" |
| W27627 | 250 | MH | 36" |
| W27628 | 400 | MH | 48" |



| | Watts | Lamp | Height |
|---|-------|------|--------|
| CORNING #73 PRISMATIC GLASS LENS WITH MULTIPLIER CONE REFLECTOR W27726 | 175 | MH | 36" |
| W27727 | 250 | MH | 36" |
| W27728 | 400 | MH | 48" |

Color Suffix

W= White
BZ= Bronze
BL= Black
Other= Contact factory

Voltage Suffix

1=120V 5=480V
2=208V 8=Multi-tap wired for 277V
3=240V 9=Multi-tap unwired.
4=277V 0=347V

EXAMPLE: W27526BL1=175 watt metal halide, corning #73 prismatic tempered glass lens with splayed stepped baffle, textured black, 120 volt.



WBE City of Chicago Certified

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com
Established 1975

10/08

