



## SPECIFICATIONS

**Housing:** Heavy duty die cast aluminum construction with corrosion resistant stainless steel hardware. Weatherproof durable silicone gaskets seal out water and bugs. See finish note.

**Lens:** Impact resistant Polycarbonate prismatic lens. Prevents glare and provides a balanced illumination.

**Optical System:** 1606 lumens, CRI 70+, 5000K, input voltage range 120-277V, 13 system watts. Standard photo control automatically powers on the fixture at dusk and off at dawn.

**Surface Mount:** Built-in Template for Mounting to an Electrical Box, or use 1/2" Surface Conduit.

**Finish:** Dark Architectural Bronze, detergent cleaned, prime coated. Chip resistant powder urethane polyester coating, electrostatic applied and baked.

**Photometric Information:** Contact factory.

**Labels:** UL, CUL listed, IP66 listed suitable for wet location, I.B.E.W. labeled.


**Fixture Warranty:** The fixture mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for five years from date of shipment from the factory. The lighting system is warranted for five years, when properly installed and under normal conditions of use. Warranty does not cover lens. See General Terms and Conditions.

*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE*




**Applications:** Ideal for indoor or outdoor use in condos, apartments, hotels, walkways and porches.

### DIMENSIONS

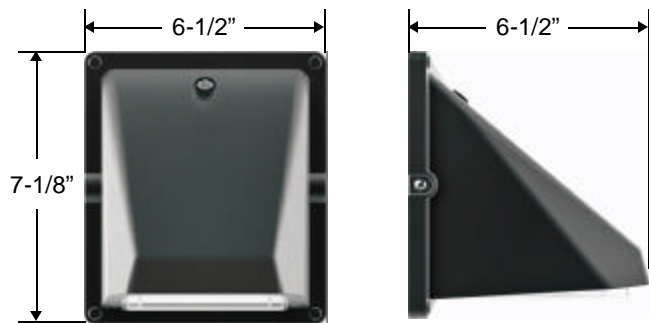

### PHOTOMETRICS

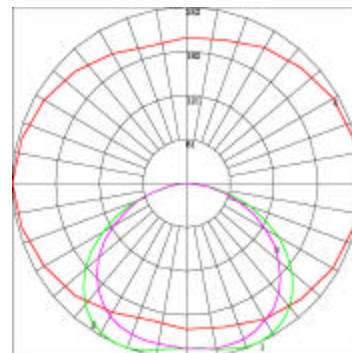

### HOW TO ORDER

Catalog Number	Number of LEDs	Wattage	Lumens	System Watts	CRI	CCT
WPL1503	1	13	1606	13	70	5000K



WBE City of Chicago Certified

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505  
Phone: 773-427-7000 Fax: 773-427-7007 [www.escolighting.com](http://www.escolighting.com)  
**Established 1975**

