



H609T^{SERIES} Dual Horizontal Compact Fluorescent Lamps 10" Diameter Aluminum Cylinder Surface, Pendant or Wall Mount

Specifications

Cylinder: .080" Aluminum, rolled and seam welded. See finish note.

Reflector: Spun aluminum #3002, polished to a mirror finish then electro-chemically processed to provide specular Alzak* finish.

Reflector Top: Extruded aluminum, supports socket and reflector. Dissipates heat from lamp and socket.

Ballast: Compact fluorescent electronic high power factor class P, universal voltage 120 thru 277 volt; 50/60 Hz.

Lamp: Compact fluorescent PLT lamp max. 42W, 4 pin base (by others).

Lamp Holder: Horizontally mounted white thermoplastic with snap-in lamp retainer springs. See table.

Mounting Pan: (Surface & Pendant Mount) Cast aluminum with 3/4" inner collar, finished to match cylinder housing.

Mounting Strap: (Surface Mount) Painted steel, mounts directly to outlet box. Supports pan with 1/4-20 studs and wing nuts.

Canopy Set: (Pendant Mount) 0-45° hang straight for 3/8" I.P. Finished to match housing.

Wall Bracket: (Wall Mount) One-piece cast aluminum bracket/arm assembly with access plate for wire inspection. Cast aluminum, wall mounting plate with 1/4" thick neoprene gasket. Quick disconnect wiring harness. Finished to match housing.


Finish: Detergent cleaned with iron phosphate and chromic acid rust inhibitor. Chip resistant powder urethane polyester coating, electro-static applied and baked. Standard colors black, white and bronze. Custom colors are available. Consult factory or sales representative.

Labels: U/L, CU/L listed & I.B.E.W labeled; flush and pendant mount suitable for damp location, wet location for wall mount.


Photometric Information: Contact factory.

*ALZAK is a registered Trademark of the Aluminum Company of America.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

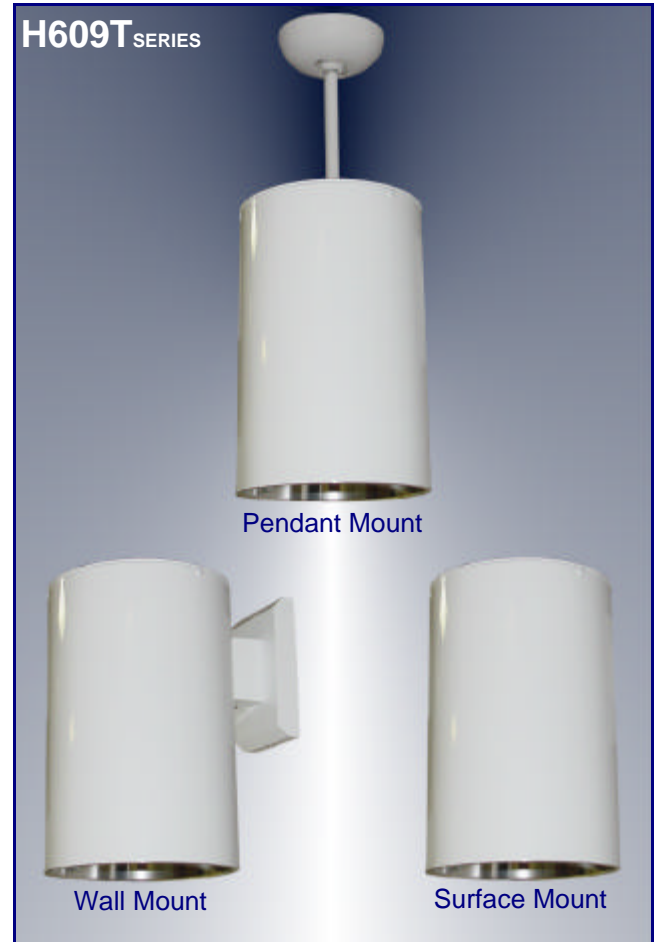

Dimensional Information

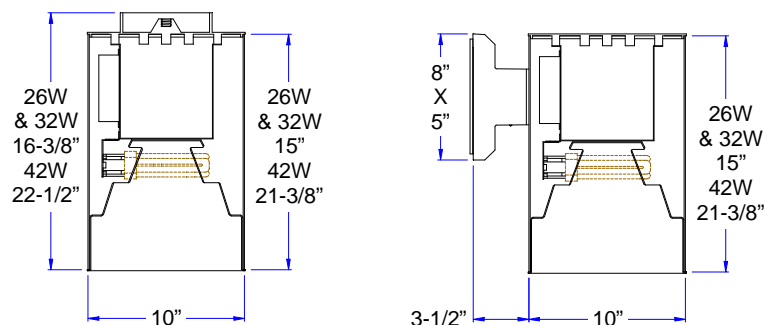

3254 North Kilbourn Avenue Chicago, Illinois 60641
Phone 773-427-7000 Fax 800-217-1260 www.escolighting.com

10-23-06













H609T SERIES

Dual Horizontal Compact Fluorescent Lamps 10" Diameter Aluminum Cylinder Surface, Pendant or Wall Mount

Catalog Numbers Lens / Aperture Options

Architectural open	Surface Mount	Watts	Lamp Base	Architectural open downlight	Surface Mount	Watts	Lamp Base
	SH609T3	26W	GX24q-3		SH619T3	26W	GX24q-3
	SH609T4	32W	GX24q-3		SH619T4	32W	GX24q-3
	SH609T5	42W	GX24q-4		SH619T5	42W	GX24q-4
C#73 Tempered prismatic glass lens.	Surface Mount	Watts	Lamp Base	Flat fresnel glass lens.	Surface Mount	Watts	Lamp Base
	SH629T3	26W	GX24q-3		SH639T3	26W	GX24q-3
	SH629T4	32W	GX24q-3		SH639T4	32W	GX24q-3
	SH629T5	42W	GX24q-4		SH639T5	42W	GX24q-4
C#73 Prismatic tempered glass lens and splayed stepped baffle.	Surface Mount	Watts	Lamp Base	Fresnel glass lens and splayed stepped baffle.	Surface Mount	Watts	Lamp Base
	SH659T3	26W	GX24q-3		SH669T3	26W	GX24q-3
	SH659T4	32W	GX24q-3		SH669T4	32W	GX24q-3
	SH659T5	42W	GX24q-4		SH669T5	42W	GX24q-4
C#73 Prismatic tempered glass lens and splayed baffle.	Surface Mount	Watts	Lamp Base	Fresnel glass lens and splayed baffle.	Surface Mount	Watts	Lamp Base
	SH689T3	26W	GX24q-3		SH699T3	26W	GX24q-3
	SH689T4	32W	GX24q-3		SH699T4	32W	GX24q-3
	SH689T5	42W	GX24q-4		SH699T5	42W	GX24q-4


Options & Accessories



Cast aluminum wall mount. Change S in catalog number to W.



Pendant mount
Suffix catalog number with Pxx. xx= Stem length in inches.
Example: P24 = canopy set with 24" stem.



Louver guard option. Suffix catalog number with LG3.



Photo Control Option
Suffix Catalog # With
PC4 120 Volt
PC5 277 Volt



Fuse and Fuse Holder
Suffix Catalog Number With "F"

Color
Suffix Catalog Number With
W= White
BZ= Bronze
BL= Black