



SPECIFICATIONS

Housing: Spun aluminum .090" thick. See Finish Note.
Reflector: Spun aluminum .040" thick, finished bright anodized.
Ballast: H.I.D.: prewired C.W.A., H.P.F. core and coil with capacitor and starter for HPS. Fluorescent: electronic with super lamp guard circuitry.
Lamp: Clear or phosphor coated H.I.D. medium base or compact fluorescent (by others).
Lamp Holder: H.I.D.: high heat porcelain w/nickel plated copper screw shell, spring loaded center contact, lamp grips, SF-2 leads (200° C). Impregnated gasket.
 Fluorescent: compact fluorescent base (see ordering information).
Door Frame: Spun aluminum ring, gasketed retains lens. Torsion spring lock-up with safety chain.
Lens: Corning #73 prismatic tempered glass.
Canopy Set:** (Pendant Mount) 0-45° hang straight for 3/8" x 12" long steel pipe standard length with P2 accessory. Other lengths available. Finished to match housing.



EZ5® Surface Mount: Cast Aluminum 5/32" thick EZ5® splice box mounts to standard 4" octagonal junction box. Safety clip supports cylinder for hands free splice connection. Three #10-32 screws set 120° apart for twist and lock-up of cylinder to splice box. Supplied with quick-connect wiring harness. Escos' EZ5® design allows the contractor to install the fixture in 5 easy minutes or less. See illustration above. Finished same as housing. See finish note.

EZ5® Wall Bracket Assembly: One-piece cast aluminum bracket /arm assembly with access plate for wire inspection. Cast aluminum, wall mounting plate with 1/4" thick neoprene gasket. Quick disconnect wiring harness. Escos' EZ5® Mounting System allows the contractor to install the fixture in 5 minutes or less. Finished same as housing. See finish note.

Finish: All painted parts are washed in alkaline solution, rinsed in an iron phosphate, baked dry, then painted with a TGIC polyester powder coating electrostatic applied and baked.

Labels: Surface and wall mount suitable for wet location; pendant mount suitable for damp location. ETL, CETL and I.B.E.W. labeled.


Photometric Information: Contact factory or visit www.escolighting.com.

Fixture Warranty: The fixture mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for ten years from date of shipment from the factory. See General Terms and Conditions.

**Canopy set for indoor applications only; contact factory for other applications and designs.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

DIMENSIONS

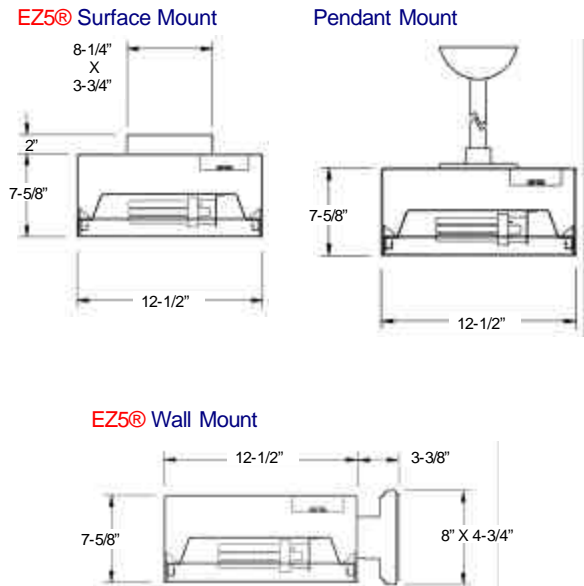

WBE City of Chicago Certified

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com
Established 1975










HOW TO ORDER

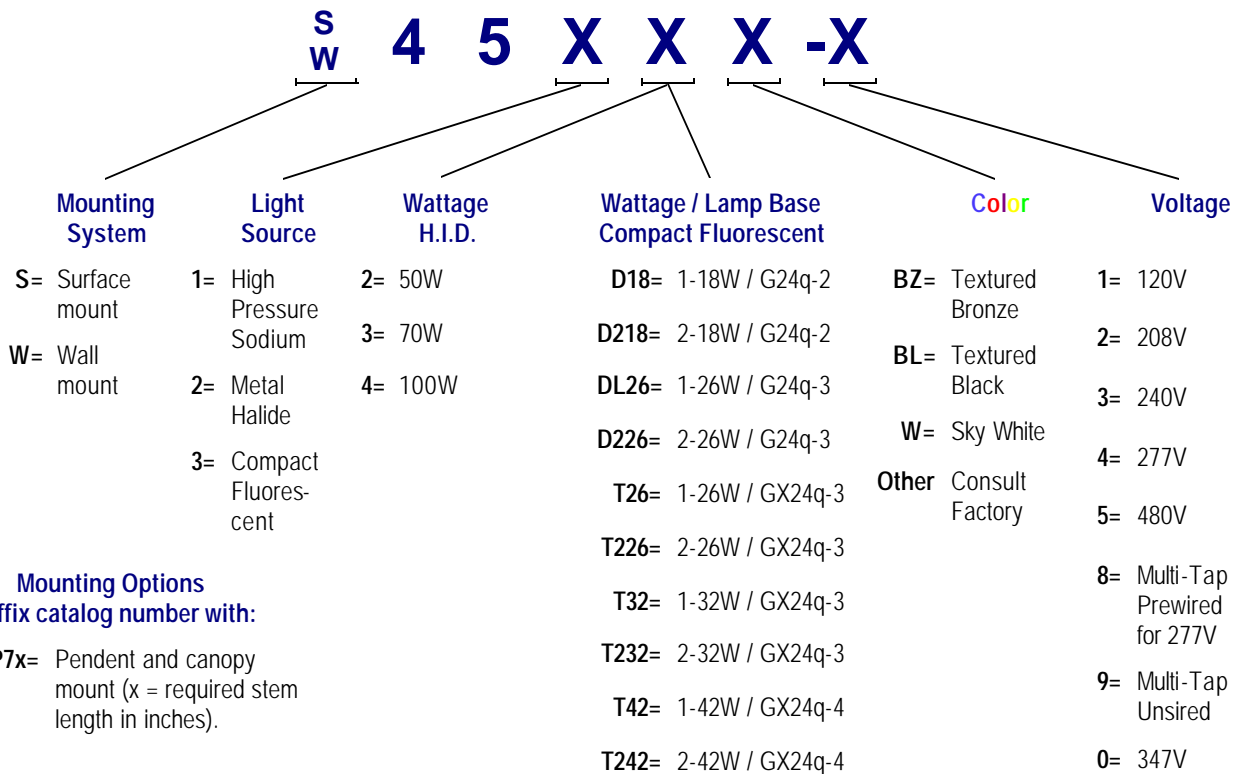Use the table below to choose the 4500 series fixture of your choice.
 Select a number from each list that corresponds to a specific feature unique to your desired requirements.

EXAMPLE: S453T242BLP724-1 = Surface mount, 2-fluorescent PLT 42W lamps, textured black, pendant mount with 24" stem, 120V.



OPTIONS AND ACCESSORIES

Mounting Options	
	Pendant Mount Suffix P2=12" long stem (standard) P2X="X" is custom stem length Example: P224= 24" long stem
	EZ5® Wall Mount Change Prefix SX to WXB Example: SXL451530 becomes WXBL451530
Other	
	Photo Control Suffix Catalog number with 120 Volt = PC4 208-277 Volt = PC5 Example: SXL451530 becomes : SXL451530PC5
	Fuse and Fuse Holder Suffix Catalog Number With F Example: : SXL451530 becomes : SXL451530F