



Municipality R15000^{Series}
10" Recessed Architectural Downlight
Universal Mounting Frame
Philips QL Induction Lamp

Specifications

Mounting Frame

18 gauge (.048") galvanized steel. Thru way splice box, adjustable mounting brackets fits most ceiling systems; minimum 1/2", maximum, 2".

Reflector

Spun aluminum .050" thick #3002, polished specular finish. Consult factory for other finishes.

Mini-groove Baffle

One piece spun aluminum, mini-groove finished Matte Black. Consult factory for other finishes.

Ballast

Philips QL induction high frequency electronic ballast 120, 200—277 volt 50 or 60 Hz.

Lamp

Philips QL induction electrodeless fluorescent lamp with average rated life 100,000 hours.

Labels

U/L, CU/L listed, suitable for wet location under covered ceiling. I.B.E.W. labeled.

Photometric Information

Contact factory.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE




R15000 Series Open Downlight Without Baffle

Catalog Number	Wattage	Lumen Output	Color Temp
R15070	55	3500	3000K
R15071	55	3500	4000K
R15080	85	6000	3000K
R15081	85	6000	4000K



R15100 Series Open Downlight With Baffle

Catalog Number	Wattage	Lumen Output	Color Temp
R15170	55	3500	3000K
R15171	55	3500	4000K
R15180	85	6000	3000K
R15181	85	6000	4000K

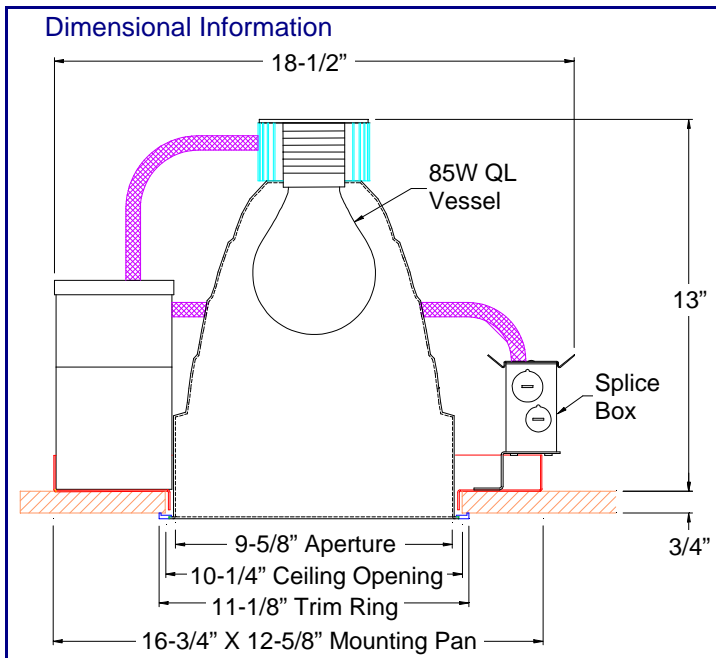

For glass lens apertures contact factory.

Philips QL Induction Lamp and Ballast System

