

SPECIFICATIONS

Housing

Die formed .050" aluminum lap seam welded construction. See finish note.

Reflector

Die formed .025" aluminum finished with high gloss baked white finish for maximum reflectance.

Lens

Clear flat glass lens or Corning #73 prismatic tempered glass lens. See ordering information.

Ballast

Prewired C.W.A., H.P.F., core and coil with capacitor (and starter for high pressure sodium).

Lamp

Clear, medium base, (by others). See table.

Lamp Holder

Porcelain socket, 4 KV rated with nickel plated copper screw shell, spring loaded center contact, lamp grips, SF-2 leads (200° C). Impregnated gasket.

Arm Assembly

One-piece cast aluminum arm and canopy welded to reinforcement plate. Mounts (1/4"-20 allen head screw) to cast aluminum universal junction box plate. Plate has 1/4" neoprene gasket for sealing to wall. Quick disconnect wiring harness. Finished same as Housing. See Finish Note.

Finish

Detergent cleaned, prime coated. Chip resistant powder urethane polyester coating, electrostatic applied and baked.

Photometric Information

Contact factory or visit www.escolighting.com.

Labels

I.B.E.W., ETL, CETL listed. Suitable for wet location.



Wall Mount
Clear Lens



Top Mount
Prismatic C73 Lens

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



WBE City of Chicago Certified

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com
Established 1975





10/08



HOW TO ORDER

Minimum Order Quantity 25

Clear tempered glass lens	Catalog Number	Light Source	Watts	Tempered prismatic C#73 lens	Catalog Number	Light Source	Watts
	29013	HPS	70		29113	HPS	70
	29014	HPS	100		29114	HPS	100
	29015	HPS	150		29115	HPS	150
	29016	HPS	175		29116	HPS	175
	29023	MH	70		29123	MH	70
	29024	MH	100		29124	MH	100
	29025	MH	150		29125	MH	150
	29026	MH	175		29126	MH	175
	290215	MH/PS	150		290115	MH/PS	150
	290217	MH/PS	175		290117	MH/PS	175

Mounting Prefix

S=Top Mount
 W=Wall Mount

Color Suffix



BZ=Textured Bronze BL=Textured Black
 W=Sky White SD=Silver

Voltage Suffix

1=120V 2=208V 3=240V
 4=277V 5=480V 7=220V
 8=Multi-Tap Wired For 277V
 9=Multi-Tap Unwired
 0=347V

EXAMPLE: W29017BLEX-1 = Wall mount, clear lens, metal halide lamp, 175W pulse start ballast, textured black, epoxy filled ballast option, 120V.

DIMENSIONS

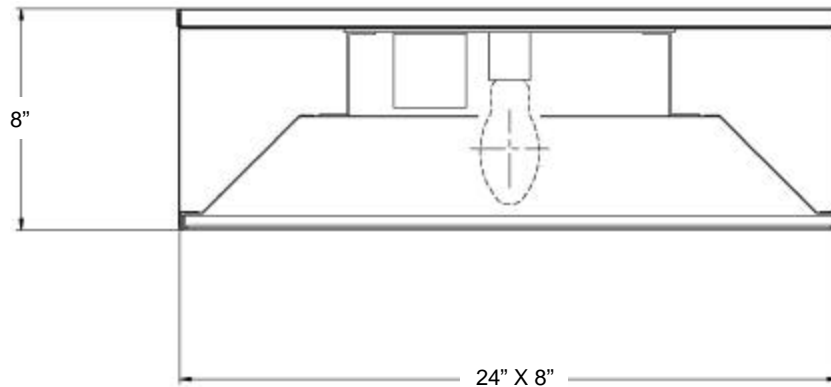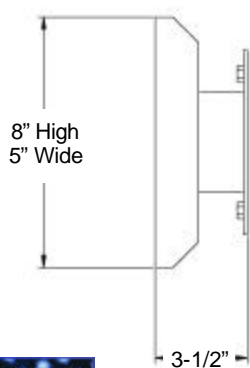

WBE City of Chicago Certified

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com
 Established 1975

