



SPECIFICATIONS

Housing

Extruded aluminum 6063-T5, .093" Thick, seamless design. Houses lens assembly, Led modules and LED drivers. Die cast aluminum end caps powder coated. See finish note.

Reflector

Combination of three reflectors for maximum lumen output: two side mount Miro® aluminum 95% reflective (shown as "A") one Led reflector supports light engines painted sky white 90% reflective. See Finish note.

EZ5® Mounting System

One-piece cast aluminum bracket/arm assembly with access plate for wire inspection. Cast aluminum, wall mounting plate with 1/4" thick neoprene gasket. Quick disconnect wiring harness. Escos's EZ5® mounting system allows the contractor to install the fixture in 5 minutes or less. Finish same as housing. See Finish Note.

Lens

Extruded Acrylic or polycarbonate .118 Thick lens mounted in steel frame 20 GA. Frame mounted to housing with 6 fasteners. Gasketed between door frame and light shield to prevent light leak and contamination.

LED

24" Two (2) Linear LED Module. 27 Watt, 3000k, 4000k, or 5000k color temperature, 3665Lm. Total Lumen output 7330Lm.

48"

Four (4) Linear LED Module. 27Watt, 3000k, 4000k, or 5000k color temperature, 3665Lm. Total Lumen output 14660Lm.

LED Driver*

24"

One (1) Universal Everline LED Driver. Class 2, Input Voltage 120-277V 50-60Hz, Dimming Control 0-10V, Short circuit and open circuit protection rate: UL Dry & Damp Locations, RoHs Compliant, UL Recognized. Total Watts 63W.


48"

Two (2) drivers same as above, totaling 126W.

*Dimming control must be 0-10V to be compatible with driver.

Finish

Detergent cleaned with iron phosphate and chromic acid rust inhibitor. Chip resistant powder urethane polyester coating, electro-static applied and baked. Standard colors are sky white, textured bronze, and textured black. Custom colors are available. Consult factory or sales representative.

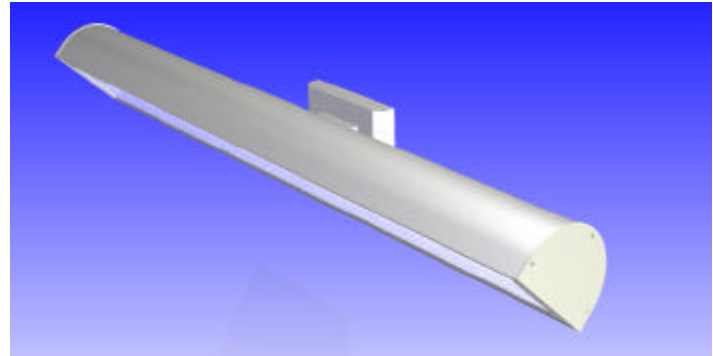

Fixture Warranty

The fixture mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for ten years from date of shipment from the factory. The LED module is warranted for five years. See General Terms and Conditions.

Photometric Information

Contact factory.


Labels

ETL, CETL listed. IBEW #134 assembled and labeled. ARRA Compliant (Pending). Made in USA.


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



DIMENSIONS

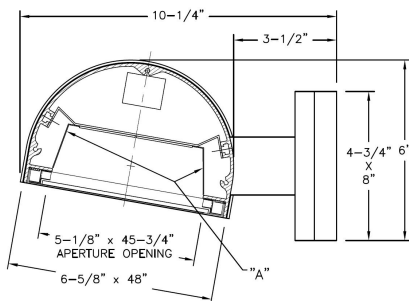

10° Angle

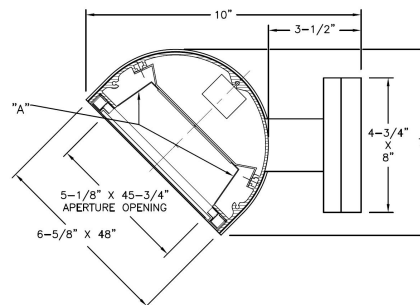

45° Angle



WBE City of Chicago Certified

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 773-427-7007 www.escolighting.com
 Established 1975



HOW TO ORDER

Catalog Number	Lens	Total System Watts	Angle	Color Temp	Cylinder Length	Total Lumens	Catalog Number	Lens	Total System Watts	Angle	Color Temp	Cylinder Length	Total Lumens
WXLH6113248	Prismatic Acrylic	63w	10°	3000K	24"	5002	WXLH6113488	Prismatic Acrylic	126w	10°	3000K	48"	10005
WXLH6114248	Prismatic Acrylic	63w	10°	4000K	24"	5276	WXLH6114488	Prismatic Acrylic	126w	10°	4000K	48"	10554
WXLH6115248	Prismatic Acrylic	63w	10°	5000K	24"	5461	WXLH6115488	Prismatic Acrylic	126w	10°	5000K	48"	10923
WXLH6213248	Prismatic Polycarbonate	63w	10°	3000K	24"	5002	WXLH6213488	Prismatic Polycarbonate	126w	10°	3000K	48"	10005
WXLH6214248	Prismatic Polycarbonate	63w	10°	4000K	24"	5276	WXLH6214488	Prismatic Polycarbonate	126w	10°	4000K	48"	10554
WXLH6215248	Prismatic Polycarbonate	63w	10°	5000K	24"	5461	WXLH6215488	Prismatic Polycarbonate	126w	10°	5000K	48"	10923
WXLH6313248	Clear Acrylic	63w	10°	3000K	24"	5002	WXLH6313488	Clear Acrylic	126w	10°	3000K	48"	10005
WXLH6314248	Clear Acrylic	63w	10°	4000K	24"	5461	WXLH6314488	Clear Acrylic	126w	10°	4000K	48"	10554
WXLH6315248	Clear Acrylic	63w	10°	5000K	24"	5461	WXLH6315488	Clear Acrylic	126w	10°	5000K	48"	10923
WXLH6413248	Clear Polycarbonate	63w	10°	3000K	24"	5002	WXLH6413488	Clear Polycarbonate	126w	10°	3000K	48"	10005
WXLH6414248	Clear Polycarbonate	63w	10°	4000K	24"	5276	WXLH6414488	Clear Polycarbonate	126w	10°	4000K	48"	10554
WXLH6415248	Clear Polycarbonate	63w	10°	5000K	24"	5461	WXLH6415488	Clear Polycarbonate	126w	10°	5000K	48"	10923
WXLH6143248	Prismatic Acrylic	63w	45°	3000K	24"	5002	WXLH6143488	Prismatic Acrylic	126w	45°	3000K	48"	10005
WXLH6144248	Prismatic Acrylic	63w	45°	4000K	24"	5276	WXLH6144488	Prismatic Acrylic	126w	45°	4000K	48"	10554
WXLH6145248	Prismatic Acrylic	63w	45°	5000K	24"	5461	WXLH6145488	Prismatic Acrylic	126w	45°	5000K	48"	10923
WXLH6243248	Prismatic Polycarbonate	63w	45°	3000K	24"	5002	WXLH6243488	Prismatic Polycarbonate	126w	45°	3000K	48"	10005
WXLH6244248	Prismatic Polycarbonate	63w	45°	4000K	24"	5276	WXLH6244488	Prismatic Polycarbonate	126w	45°	4000K	48"	10554
WXLH6245248	Prismatic Polycarbonate	63w	45°	5000K	24"	5461	WXLH6245488	Prismatic Polycarbonate	126w	45°	5000K	48"	10923
WXLH6343248	Clear Acrylic	63w	45°	3000K	24"	5002	WXLH6343488	Clear Acrylic	126w	45°	3000K	48"	10005
WXLH6344248	Clear Acrylic	63w	45°	4000K	24"	5276	WXLH6344488	Clear Acrylic	126w	45°	4000K	48"	10554
WXLH6345248	Clear Acrylic	63w	45°	5000K	24"	5461	WXLH6345488	Clear Acrylic	126w	45°	5000K	48"	10923
WXLH6443248	Clear Polycarbonate	63w	45°	3000K	24"	5002	WXLH6443488	Clear Polycarbonate	126w	45°	3000K	48"	10005
WXLH6444248	Clear Polycarbonate	63w	45°	4000K	24"	5276	WXLH6444488	Clear Polycarbonate	126w	45°	4000K	48"	10554
WXLH6445248	Clear Polycarbonate	63w	45°	5000K	24"	5461	WXLH6445488	Clear Polycarbonate	126w	45°	5000K	48"	10923

ACCESSORIES AND OPTIONS

FINISH COLOR Suffix Catalog Number with:
 Textured Black: BL
 Textured Bronze: BZ
 Sky White: W
Example: WXLH6113248BL

Photo control Suffix catalog number with
 PC4 = 120V
 PC5 = 277V
Example: WXLH6113248 = WXLH6113248PC4

EXAMPLE ORDER: WXLH6113248BL = Prismatic Acrylic lens, 54W, 10° angle, 3000K, textured black



WBE City of Chicago Certified

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 773-427-7007 www.escolighting.com
Established 1975