



SPECIFICATIONS

Housing: Die cast aluminum with internal rib design to prevent wall distortion or stress sagging; built-in hinge. External 16GA. Mounting flange provided with (4) 1/2" by 3/4" mounting holes for fixture installation. Housing shall have penetration from external junction box to the ballast compartment sealed with weatherproof wire connector (connector shall have individual holes in grommet for each wire). Finished architectural bronze. See finish note.

Door Assembly: Die cast aluminum, clear tempered lens, silicone caulked to frame plus eight hold down clips, integral silicone door frame gasket to complete lifetime seal. Finished architectural bronze. See finish note.

Reflector: Computer generated one-piece semi-specular aluminum for maximum efficiency.

Ballast: High frequency electronic ballast 100W 120—277V. Contact factory for other voltages.

Lamp: SYLVANIA ICETRON® from Osram Sylvania electrodeless fluorescent lamp with average rated life of 100,000 hours.

Finish: Detergent cleaned with iron phosphate and chromic acid rust inhibitor, resistant chip resistant powder urethane polyester coating, electrostatic applied and baked. Standard colors textured black, sky white and textured bronze. Custom colors are available. Consult factory or sales representative.

Labels: I.B.E.W. labeled, ETL / CETL listed. Suitable for wet location.


Fixture Warranty: The mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for five years from date of shipment from the factory. See general terms and conditions.

Photometric Information: Contact factory.


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



DIMENSIONS

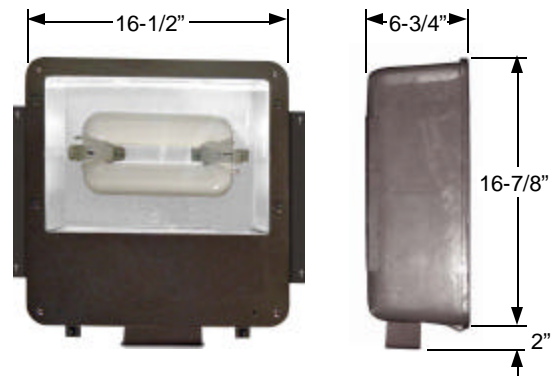

PHOTOMETRICS

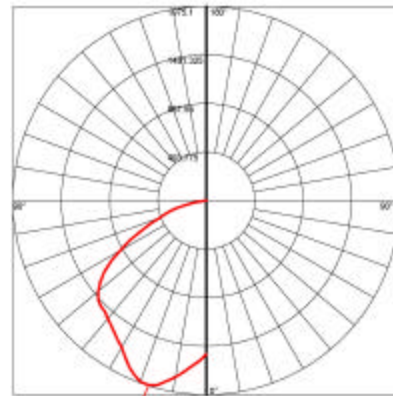

WBE City of Chicago Certified

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com
 Established 1975





HOW TO ORDER



Catalog Number	Lamps	Initial Lumens	Ballast	Color Temp
SFLi33516	70W	6,815	ICE/100W	3500
SFLi34116	70W	6,815	ICE/100W	4100
SFLi35016	70W	6,655	ICE/100W	5000
SFLi43516	100W	8,600	ICE/100W	3500
SFLi44116	100W	8,600	ICE/100W	4100
SFLi45016	100W	8,300	ICE/100W	5000
SFLi53516	100W	11,800	ICE/150W	3500
SFLi54116	100W	11,800	ICE/150W	4100
SFLi55016	100W	11,450	ICE/150W	5000

EXAMPLE ORDER NUMBER: SFLi43516 = ICETRON induction 100 watt lamp, 3500k.

ACCESSORIES



Fuse and Fuse Holder
 Add suffix "F"
 to order number.



Photo Control
 Add suffix "PC"
 to order number.
 *Specify 120v or 277v



WBE City of Chicago Certified

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com
 Established 1975

